Plant Schedule

Trees

Species Name	Girth	Height	Density	Specification	No.
Ilex aquifolium		40-60cm	0.5Ctr Double Staggered at 0.5m offset	Bushy C Planted as mixed hedge	18No
Crataegus monogyna		60-100cm	0.5Ctr Double Staggered at 0.5m offset	Transplant BR Planted as mixed hedge	30No
Magnolia liebneri 'Merrill'	6-8cm	250-300cm	Counted	Half Standard 2x C	2No
Cercis siliquastrum (Judas Tree)	6-8cm	250-300cm	Counted	Half Standard 2x C	2No
Amelanchier arborea 'Robin Hill'	6-8cm	250-300cm	Counted	Half Standard 2x C	2No
Betula pendula	12-14cm	550-425cm	Counted	Heavy Standard 3x RB	3No
Pyrus calleryana 'Chanticleer'	12-14cm	550-425cm	Counted	Heavy Standard 3x RB	1No
Sorbus aucuparia	12-14cm	550-425cm	Counted	Heavy Standard 3x RB	2No
Carpinus betulus 'Fastigiata'	12-14cm	550-425cm	Counted	Heavy Standard 3x RB	4No
Fagus sylvatica	20-25cm	min. 450cm	Counted	Semi mature 3x RB	1No

Conifers

Species Name	Height	Pot Size	Specification	Density	No.
Pinus mugo 'Mops'	30-40cm	5L	Bushy C	4/m²	15No

Shrubs

Species Name	Height	Pot Size	Specification	Density	No.
Berberis thunbergii 'Atropurpurea Nana'	30-35cm	5L	Bushy 3 brks C	3/m²	27No
Berberis thunbergii 'Atropurpurea'	30-40cm	5L	Bushy C	4/m²	22No
Brachyglottis 'Sunshine'	30-40cm	5L	Bushy 5 brks C	3/m²	53No
Ceanothus thyrsiflorus repens	30-40cm	5L	Branched 5 brks C	3/m²	53No
Choisya 'Aztec Pearl'	30-40cm	5L	Bushy C	4/m²	29No
Cistus purpureus 'Alan Fradd'	40-60cm	5L	Bushy C	4/m²	20No
Cornus sanguinea 'Midwinter Fire'	40-60cm	5L	Branched C	4/m²	39No
Cornus stolonifera 'Flaviramea'	40-60cm	5L	Branched C	4/m²	27No
Corylus avellana	80-100cm		Branched BR Planted as native hedge	0.5Ctr Double Staggered at 0.5m offset	30No
Elaeagnus ebbingei	80-100cm	10L	Branched C Planted and maintained as hedge	0.5Ctr	200No
Escallonia rubra 'Crimson Spire'	40-60cm	5L	Branched C Plante and maintained as hedge	0.3Ctr	85No
Euonymus fortunei 'Silver Queen'	30-40cm	5L	Bushy C	4/m²	38No
Hebe cupressoides	30-40cm	5L	Bushy C	4/m²	20No
Hebe franciscana 'Variegata'	30-40cm	5L	Bushy C	4/m²	56No
Hebe rakaiensis	30-40cm	5L	Bushy 7 brks C	3/m²	83No
Lavandula angustifolia 'Hidcote'	30-40cm	5L	Bushy C	4/m²	12No
Lavandula angustifolia 'Twickel Purple'	30-40cm	5L	Bushy 7 brks C	3/m²	53No
Ligustrum vulgare	80-100cm		Branched BR Planted as native hedge	0.5Ctr Double Staggered at 0.5m offset	18No
Lonicera nitida 'May Green'	30-40cm	3L	Bushy C	4/m²	71No
Prunus lusitanica	40-60cm	5L	Branched C Planted and maintained as hedge	0.3Ctr	161No
Prunus spinosa	80-100cm		Branched BR Planted as native hedge	0.5Ctr Double Staggered at 0.5m offset	24No
Sarcococca confusa	20-30cm	3L	Bushy C	4/m²	37No
Skimmia confusa 'Kew Green'	30-40cm	5L	Bushy C	4/m²	29No
Spiraea japonica 'Goldflame'	40-60cm	5L	Bushy 7 brks C	3/m²	27No
Viburnum davidii	30-40cm	5L	Bushy C	4/m²	22No
Viburnum tinus 'Eve Price'	30-40cm	3L	Bushy C	4/m²	41No

Bulbs

Species Name	Specification	Density	No.
Crocus 'Golden Yellow'	Grade 6/+	10/m²	49No
Crocus 'Jeane D'Arc'	Grade 6/+	10/m²	74No
Crocus 'Queen of the Blues'	Grade 6/+	10/m²	74No
Narcissus 'Canaliculatus'	Grade 6/+	10/m²	99No
Narcissus 'February Gold'	Grade 6/+	10/m²	99No
Narcissus 'Jet Fire'	Grade 6/+	10/m²	99No

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION. FOR PLANNING PURPOSES ONLY

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail tree pit detail
- Proposed *Prunus lusitanica* (Portuguese laurel) and *Escallonia* hedge planting to be planted in a single row at 300mm centres in each row. To be maintained at 1m height
- Proposed *Elaeagnus ebbingei* (Oleaster) hedge planting to be planted in a single row at 500mm centres in each row. To be maintained at 1.1m height alongside boundary hoop top railings
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1.8m height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed mixed shrub planting 'low ornamental mix' to be planted in groups of 5-7no. of each species at 3 plants per msq and as above
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed mixed bulb planting. To be scattered in natural swathes in groups of 10-20no. of each species. Planted in autumn. Daffodils planted 3x depth of bulb and Crocus planted at 10cm depth
- Site boundary

4 3 2 1 0 2 4 6m

Rev	Date	Details	Drawn

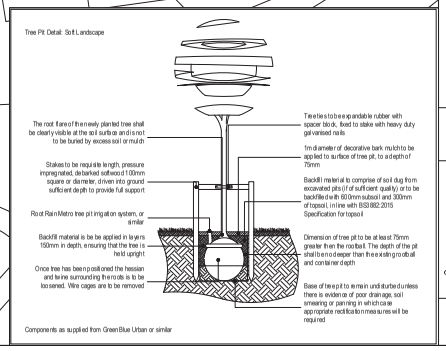

ACD ENVIRONMENTAL
HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425774

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02392 026300

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

scheme: Britannia Way.
Telford
client: Living Space Housing
drawing: Landscape Proposals
date: Jan 2019
scale: 1:200@A1
drawing no: LSH22039-11
drawn: JS checked: AD

Copyright of ACD Environmental Ltd. All rights reserved in Chapter IV of the Copyright, Designs and Patents Act 1988 have been asserted. 2011 Copyright of this plan remains with ACD and it may not be reproduced in whole or in part without prior written permission.